


LLDPE - Product Data Sheet

HF 123

LLDPE

SASOL
reaching new frontiers



Date of Issue: February 2002

Print Date: July 2002

Information
Polymer technology centre
P O Box 72
Modderfontein 1645
South Africa

Tel: +27 (0) 11 458 0700
Fax: +27 (0) 11 458 0734

Polyethylene sales
Sasol Polymers
Johannesburg
Tel: +27 (0) 11 790 1250
Cape Town
Tel: +27 (0) 21 686 7740
Durban
Tel: +27 (0) 31 267 0777

www.sasol.com/polymers

Sasol Polymers
Polythene Business

Film

Melt index: 1.0

Density: 0.929

Features

UCC gas phase resin
Hexene copolymer
Outstanding mechanical properties
Good heat sealing range

Additives

High slip
High antiblock
Antioxidants

Applications

General packaging thin film
(10µm to 30µm)
Not recommended for lamination film
Blending with LDPE

Performance properties - HF 123

Test	Value	Unit	Test method	
MFI (190°C/2.16kg)	1.0	g/10min	ASTM D1238	
Nominal density	0.929	g/cm ³	ASTM D1505	
Tensile strength at yield	MD	12.1	MPa	ASTM D882
	TD	13.0	MPa	ASTM D882
Tensile strength at break	MD	30.6	MPa	ASTM D882
	TD	22.8	MPa	ASTM D882
Elongation	MD	404	%	ASTM D882
	TD	485	%	ASTM D882
Tear strength	MD	6.4	g/µm	ASTM D1922
	TD	24.6	g/µm	ASTM D1922
Impact strength		131	F _{50g}	ASTM D1709
Haze		14.9	%	ASTM D1003
Gloss		45	units	ASTM D2457
Coefficients of friction	µs	0.12	units	ASTM D1894
	µd	0.11	units	ASTM D1894

The above values were calculated from data for 30µm film produced on a 75mm Barmag extruder with 190°C melt temperature using a 2.3:1 blow ratio.

Processing

HF123 should be processed on equipment designed or retrofitted for LLDPE ie.

1. Increased die gap (~3mm) unless a processing aid is incorporated.
2. Suitable screw eg. Sasol Polymers design full length general purpose decreasing pitch.
3. Aerodynamic cooling systems.


Recommended melt temperature:

190°C (minimum 180°C, maximum 200°C)

Recommended screen pack: 20/40/20 BS mesh.

Blow ratios of greater than 2:1 recommended.

°C	H	1	2	3	4	D
220						
200						
180						
160						
140						

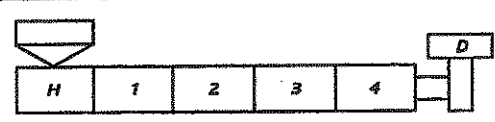

Presentation

Supplied in pellet form packed in 25kg bags.

Food Packaging

This material complies with F&DA regulation 177.1520 when used unmodified and according to good manufacturing practices for food contact applications. Accordingly, this material may be used in all food contact applications (except holding food during cooking).

Conveying

Conveying equipment should be designed to prevent accumulation of fines and dust particles that are contained in all polyethylene resins. These fines and dust particles can, under certain conditions, pose an explosion hazard. We recommend the conveying system used:

1. be equipped with adequate filters;
2. is operated and maintained in such a manner to ensure no leaks develop;
3. that adequate grounding exists at all times.

We further recommend good housekeeping be practised throughout the facility.

Storage

As ultraviolet light may cause a change in the material, all resins should be protected from direct sunlight during storage.

Handling


Workers should be protected from the possibility of skin or eye contact with molten polymer. Safety glasses are suggested as a minimal precaution to prevent possible mechanical or thermal injury to the eyes. Fabrication areas should be ventilated to carry away fumes or vapours.

Combustibility

Polyethylene resins will burn when supplied with adequate heat and oxygen. They should be handled and stored away from contact with direct flames and/or other ignition sources. In burning, polyethylene resins contribute high heat and may generate a dense black smoke. Fires can be extinguished by conventional means, with water and water mist preferred. In enclosed areas, fire fighters should be provided with self-contained breathing apparatus.

LDPE - Preliminary Product Data Sheet

SASOL
reaching new frontiers



LT660

Date of issue: June 2006
Information

Polymer Technology Centre
P O Box 72
Modderfontein 1645
South Africa

Tel: +27 (0) 11 458 0700
Fax: +27 (0) 11 458 0734

Polyethylene sales

Sasol Polymers
Johannesburg
Tel: +27 (0) 11 790 1250
Cape Town
Tel: +27 (0) 21 658 6320
Durban
Tel: +27 (0) 31 267 0777

Sasol Polymers
Polythene Business

Film

Melt Index: 2.00

Density: 0.923

Features

Tubular resin
Good clarity
Wide Sealing range
Good drawdown

Additives

Antioxidant
Medium Slip
Medium antiblock

Applications

General packaging
Clarity film
Boutique bags
Thin film


Performance properties - LT660

Test	Value	Unit	Test method	Based on
MFI (190°C/2.16kg)	2.0	g/10min	PTM 058	ASTM D1238
Nominal density	0.923	g/cm ³	PTM 002	ASTM D1505
Tensile strength at yield	10	MPa	PTM 006	ASTM D882
	10	MPa	PTM 006	ASTM D882
Tensile strength at break	24	MPa	PTM 006	ASTM D882
	16	MPa	PTM 006	ASTM D882
Elongation	212	%	PTM 006	ASTM D882
	367	%	PTM 006	ASTM D882
Elmendorf tear	5.8	g/μm	PTM 009	ASTM D1922
	5.3	g/μm	PTM 009	ASTM D1922
Impact strength	75	F _{nd}	PTM 066	ASTM D1709
Haze	8.1	%	PTM 065	ASTM D1003
Gloss	63	units	PTM 064	ASTM D2457
Clarity	46	units	PTM 071	ASTM D1746
Coefficient of friction	0.10	units	PTM 026	ASTM D1894
	0.10	units	PTM 026	ASTM D1894
Blocking	<25	g	PTM 034	ASTM D3354

The above values were measured on 30μm film produced on a 75mm Barmag extruder with GPDP screw and a 250mm die, using 170°C melt temperature, 625mm FLH and 2.5:1 blow ratio.

LDPE - Preliminary Product Data Sheet


SASOL
reaching new frontiers



Processing

Optimum melt temperature: 190°C. Should be processed on a conventional LDPE extruder, but can be processed on a LLDPE extruder (wide die gap) with drawdown limitations. The optimum blow ratio is 2:1. However excellent properties are obtained at a blow ratio of 1.4:1 (for > 100µm thick film). Recommended screen pack: 60/100/60 BS mesh.

LT033 film

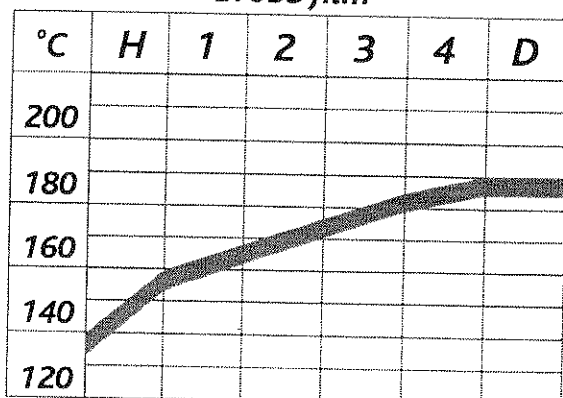

Presentation

Supplied in pellet form in 25kg bags.

Food Packaging

This material complies with F&DA regulation 177.1520 when used unmodified and according to good manufacturing practices for food contact applications. Accordingly, this material may be used in all food contact applications (except holding foods during cooking).

Conveying

Conveying equipment should be designed to prevent accumulation of fines and dust particles that are contained in all polyethylene resins. These fines and dust particles can, under certain conditions, pose an explosion hazard. We recommend that the conveying system used:

1. be equipped with adequate filters
2. is operated and maintained in such a manner to ensure no leaks develop
3. that adequate grounding exists at all times

We further recommend that good housekeeping be practised throughout the facility.

Storage

As ultraviolet light may cause a change in the material, all resins should be protected from direct sunlight during storage.

Handling

Workers should be protected from the possibility of skin or eye contact with molten polymer. Safety glasses are suggested as a minimal protection to prevent possible mechanical or thermal injury to the eyes. Fabrication areas should be ventilated to carry away fumes or vapours.

Combustibility

Polyethylene resins will burn when supplied adequate heat and oxygen. They should be handled and stored away from contact with direct flames and/or other ignition sources. In burning, polyethylene resins contribute high heat and may generate a dense black smoke. Fires can be extinguished by conventional means with water and water mist preferred. In enclosed areas, fire fighters should be provided with self contained breathing apparatus.

This information is based on our current knowledge and experience. In view of many factors that may affect processing and application, this data does not relieve processors from the responsibility of carrying out their own tests and experiments, neither does it imply any legally binding assurance of certain properties for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any proprietary rights and existing laws and legislation are observed.